EUROVAC I - WELDING CENTRAL VACUUM SYSTEM (30FS2)

Product Description

The Eurovac I – 30" Combo System is skid mounted for easy transportation and comes pre-wired from the central panel to both the pump and the pulse jet cleaning feature. The unit utilizes an induction motor which is designed for non-stop operation and is rated to run for over 20,000 hours. The 30" diameter cyclonic separator with two (2) nano cartridge filter (440 ft^2 filter media total) removes 99% of dust (up to 3 microns) and the automatic compressed air pulse jet cleaning ensures very little maintenance. All systems are available in three phase voltage, 60 or 50 hertz and typically utilizes low voltage wiring to turn system on/off.

Controls

On/Off, Overload Protection, Run Light, Hour Meter, 24v Step Down Transformer (i.e. control of remote switches), Automatic Filter Cleaning, Magnahelic Gauge (dirty filter indicator), Off Delay Timer.

Technical Data:

Model Number	EIP-P05 - 18132002	EIP-P10- 18132002	EIP-P15- 18132002
Horse Power	5 HP	10 HP	15 HP
Voltage	208, 240, 460, 575		
Power	3 PH 60 Hz*		
Airflow (max.)	212 CFM	340 CFM	512 CFM
Pressure (max.)	108" WC	124" WC	85" WC
Sound Level @ 10'	78 dB(A)	79 dB(A)	79 dB(A)
Collection Capacity	20 gallons	20 gallons	20 gallons
Filter Area	440 ft^2		
Filter Efficiency	99.93% @ 3 microns or larger		
HEPA (opt.)	99.97% @ 0.3 microns		

**50Hz available on request*

Applications:

Sanding Grinding Housekeeping

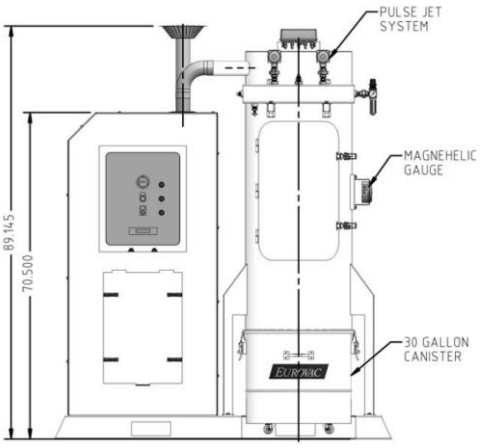

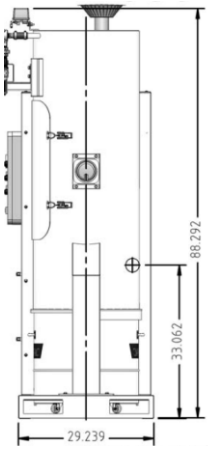

For more information, contact Eurovac:

CANADA and USA
Toll-Free 800-265-3878 / Fax 416-744-8079
info@eurovac.com

44 Milvan Dr., North York, ON M9L 1Z3
5927 Center Rd, Unit 3, Valley City, OH 44039

www.eurovac.com